


80x40 RHS post fully welded
to the baseplate post section
dependant on location of the
post to be fixed
Underside of the baseplate
approx 100mm below the kerb
level

Pitch level

300mmx250mm x 10mm thick
baseplate with 4 no m16 grade
8.8 galv rods 250mm long
fixed into concrete using Hilti
HY200 resin

Non shrink grout

Kerb

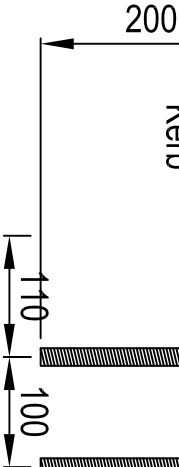

Concrete lighting base

Client:

Project:

T8 rebound fencing

Title:

Bolt down post side view
Galv and PPC 9005 black

Drawn:

GR

General Notes:

1. Check sizes prior to start.
2. All Dimensions in mm Unless Stated Otherwise.
3. Do Not Scale From Drawing.
4. If In Doubt Ask.
5. All Sharp Edges & Splatter To Be Removed.

Rev.	Description	Date



No 200312

Scale:

TBC



No 43557

Date:



FENCING AND BLACKSMITH CONTRACTORS

Web: www.wrightmadennan.co.uk

Status:

3

Project No:

K/6531

Dwg Ref:

A31[20]

Camps Industrial Estate
Kilnmevon
Midlothian
EH27 8DF
Tel: 01506 881486
Fax: 01506 883669